

Sample Gas Cooler EGK 1SD



Accurate measurements of gases require gas samples with stable dew points even under harsh ambient conditions.

The EGK models provide a compressor-type cooling system connected to a cooling block. The cooling block evenly dissipates the heat thus supporting the highly efficient heat exchangers. The temperature of the cooling block is regulated by the **Bühler Constant Regulating System**. This system allows smooth regulation and eliminates the disadvantages of the traditional on-off operating mode.

The EGK 1 SD has an internal display showing the cooling block temperature which blinks with status alarm (± 5 °F deviation of the preset temperature). In both models, a dry relay contact is built in for status monitoring.

The cooling block accommodates either a single stream or a dual stream heat exchanger hence the cooler may serve two separate sample gas streams.


Condensate is removed either by peristaltic pumps, by automatic condensate drains or condensate vessels.

- **Compact design**
- **Single or dual gas streams**
- **Heat exchangers made of stainless steel or Duran glass**
- **Bühler Constant Regulating System**
- **Cooling block temperature display**
- **Status alarm**
- **Cooling capacity 300 Btu/hr**


Technical Data

Ready for operation	max. 15 minutes
Cooling capacity (at 77°F)	300 Btu/hr
Ambient temperature	40-120 °F
Dewpoint (set at factory)	approx. 40 °F
Power supply	115 or 230V, 50/60 Hz, Plug: DIN 43650
Power consumption	290/260 VA, fuse (external) 10 A
Alarm output:	max. 250V, 2 A, 50 VA Plug: DIN 43650
Protection class	IP 20
Housing	Stainless steel
Installation	Table or wall mounting
Packing dimensions	approx. 15.5 x 12 x 16 inches
weight incl. heat exchangers	approx. 33 lb.


Dimensions (in)

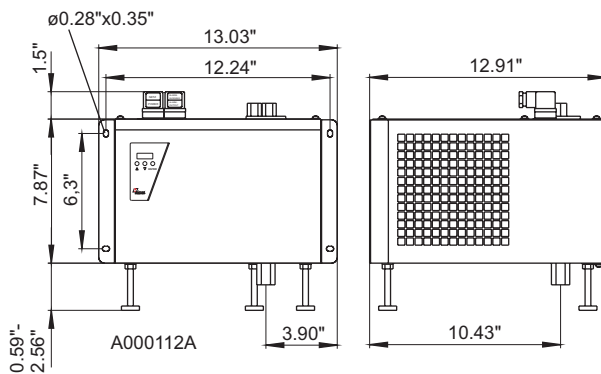

Performance Data

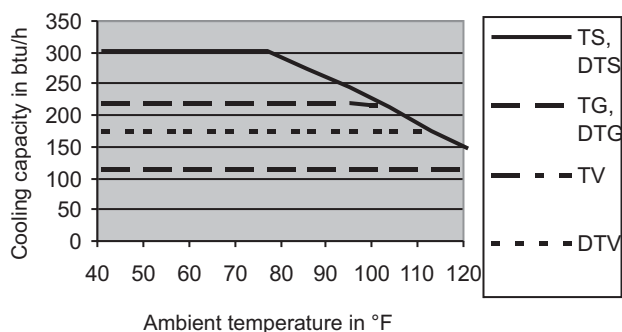

Typical Installation Diagram:

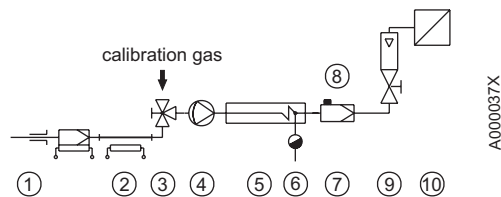

- | | |
|---|---------------------|
| 1 Sample probe | 7 Moisture detector |
| 2 Sample tube | 8 Fine filter |
| 3 3 way valve | 9 Flowmeter |
| 4 Sample gas pump | 10 Analyzer |
| 5 Sample gas cooler
EGK-1/2 | |
| 6 Automatic condensate
drain or perist. pump | |
- For types and specs of components, see individual data sheets.

Heat Exchanger

The energy content of the sample gas and, as a result, the required cooling capacity of the gas cooler is determined by 3 parameters: gas temperature ϑ_G , dewpoint τ_e (moisture content) and flow v . The outlet dew point rises with increasing energy content (heat) of the gas. The required cooling capacity is determined by the maximum acceptable level of the outlet dew point.

The following table shows cooler performance assuming the following conditions: $\tau_e=120^\circ\text{F}$ and $\vartheta_G=160^\circ\text{F}$. Indicated is the v_{max} in lpm cooled air (i.e. after the moisture has condensed). If the actual values stay below the parameters τ_e and ϑ_G , v_{max} can be increased. For example (TG), instead of $\tau_e=120^\circ\text{F}$, $\vartheta_G=160^\circ\text{F}$ and $v=5.7$ lpm the values $\tau_e=105^\circ\text{F}$, $\vartheta_G=160^\circ\text{F}$ a maximum flow rate of $v=7.1$ lpm could be achieved.

Please contact one of Buhler's application specialists for assistance and further information.

Heat exchanger	TS	TV-SS	DTS	DTV ³⁾
Flow rate v_{max} ¹⁾	8.8 lpm	2.6 lpm	2 x 4.2 lpm	2 x 1.9 lpm
Inlet dewpoint $\tau_{e,\text{max}}$ ¹⁾	180 °F	150 °F	180 °F	150 °F
Gas inlet temperature. $\vartheta_{G,\text{max}}$ ¹⁾	360 °F	285 °F	360 °F	285 °F
Max. cooling capacity Q_{max}	425 Btu/hr	115 Btu/hr	425 Btu/hr	175 Btu/hr
Gas pressure p_{max}	2300 psi	43 psi	360 psi	29 psi
Pressure drop Δp ($v=150$ l/h)	0.1 psi	0.1 psi	each 0.1 psi	each 0.1 psi
Dead volume V_{tot}	4.2 cu. in.	7.9 cu. in.	1.7 / 1.5 cu. in.	1.3 / 1.3 cu. in.
Sample gas connections	G 1/4" i ²⁾	DN4/6	tube 6 mm	DN 4/6
Condensate outlet connections	G 3/8" i ²⁾	G3/8" i	tube 10 mm	DN 4/6

¹⁾ with maximum heat transfer of the heat exchanger and max. cooling capacity of the cooler

²⁾ NPT-threads upon request

³⁾ Can only be used with peristaltic pumps

Please indicate with order

Cooler EGK 1 SD

45 65 099	EGK 1 SD 230V, 50/60Hz
45 66 099	EGK 1 SD 115V, 50/60Hz

Accessories

45 10 023	Heat exchanger TS, stainless steel 1.4571
45 01 004	Heat exchanger TV-SS, single stream, PVDF
45 01 026	Heat exchanger DTS, Stainless steel 1.4571 dual
45 01 028*	Heat exchanger DTV, double stream, PVDF
45 10 122	Peristaltic pump 230 V, 0.005 lpm, sep. mounting
45 10 222	Peristaltic pump 115 V, 0.005 lpm, sep. mounting
44 10 001*	Automatic condensate drain 11 LD V 38
44 10 004*	Automatic condensate drain AK 20, PVDF
44 10 005*	Condensate vessel GL 1; glass, 0,4 l
44 10 019*	Condensate vessel GL 2; glass, 1 l

* Notice: DTV only with peristaltic pump